

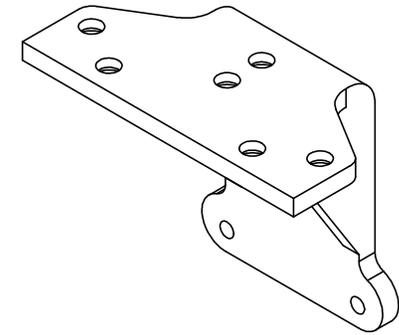


Right hand shown-Left hand opposite
Minimum top rail distance 7-1/2"

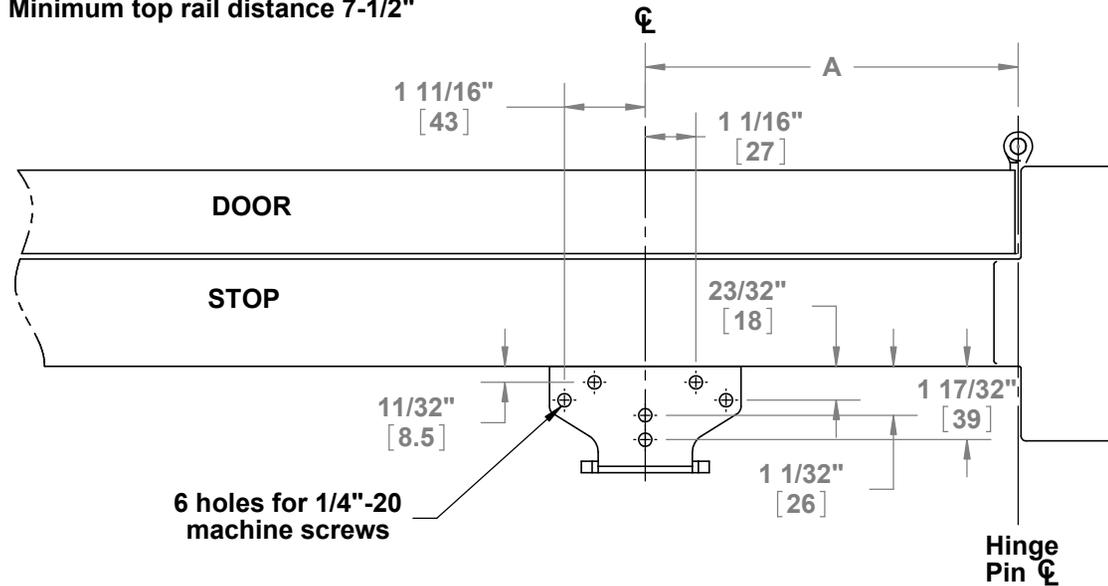

REV.	DESCRIPTION	ECO NO.	DATE
01	ORIGINAL RELEASE		2/11/2010
02	ADDED TOP RAIL NOTE		11/10/2011

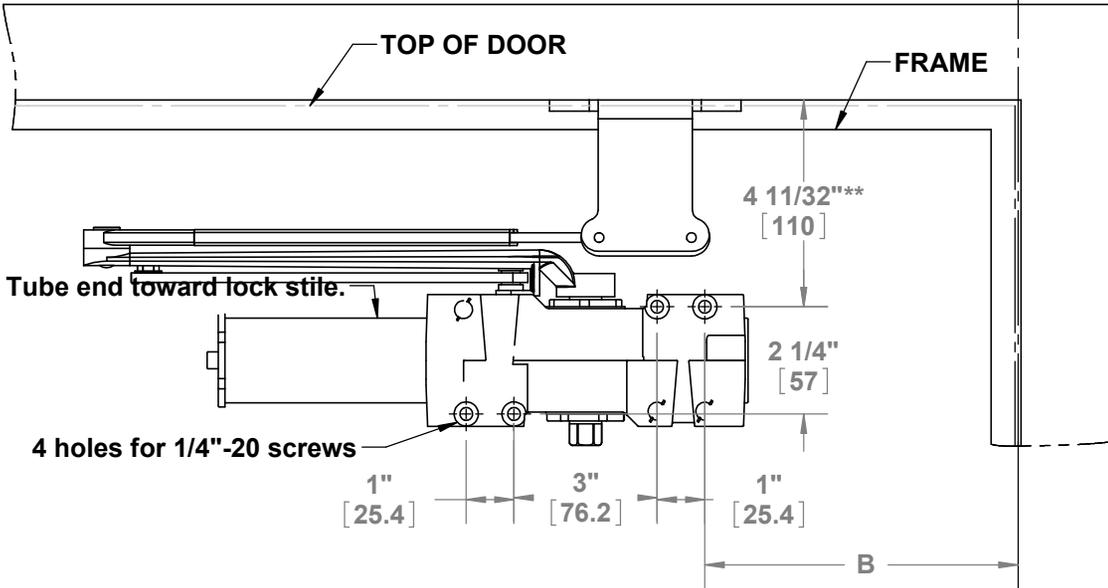

Screw pack contains:
5 pcs 1/4" x 1-1/2" self-taping & drilling flat head wood screw
5 pcs 1/4"-20 x 1-1/2" self-taping & drilling flat head metal screw

Opening	Dimension 'A'	Dimension 'B'
up to 90°	11-1/2" (292mm)	9-1/2" (241mm)
90° to 120°	10" (254mm)	8" (203mm)
120° to 180°	7-7/8" (200mm)*	6-1/2" (165mm)

* Door/Wall/Hardware/Jamb conditions permitting.
**This dimension is always from the same surface that the drop bracket is mounted.

Reference 5100 closer instructions for further closer installation detail.



PROPRIETARY & CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAGER COMPANIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HAGER COMPANIES IS PROHIBITED.

HAGER RESERVES THE RIGHT TO MAKE DESIGN CHANGES WITHOUT NOTICE. CALL HAGER ENGINEERING AT 1-800-325-9995 FOR THE LATEST REVISION DATE OF TEMPLATE.

DRAWN	NJ	2/9/2010
ENG. APPR.	-	-
MATERIAL	Material <not specified>	
FINISH	-	
DO NOT SCALE DRAWING		
TOLERANCES: FRACTIONAL: ±0.015" ANGULAR: MACH: ± 1° BEND: ±1° TWO PLACE DECIMAL: ±0.01" THREE PLACE DECIMAL: ±0.004"		

5935(5100)		REV.
EXTRA CLEARANCE BRACKET		02
SIZE	DWG. NO.	
A	I-CL00276	
SCALE: 1:4	WEIGHT:	SHEET 1 OF 1